

# GEOLANDAR A/T-S®

## Bold, Off-Road Attitude Combined With Exceptional On-Road Performance.

GEOLANDAR A/T-S® all-terrain tires have an aggressive design that'll make today's trucks or SUVs stand tall. But the real beauty lies deeper. With features ranging from Multi-Stepped Grooves to Dual Interlocking Pyramid Sipes, every Geolandar A/T-S packs the absolute latest in technology to deliver long, even treadwear. Featuring an extensive size line-up, the Geolandar A/T-S and its powerful on/off-road performance can be experienced across a broad range of applications.


### ROUNDED-EDGE TREAD BLOCKS

Soften the contact between individual tread blocks and the ground to combat uneven tire wear and reduce noise.




### DUAL INTERLOCKING PYRAMID SIPES

Maintain tread block rigidity for improved tire wear and excellent all-weather traction.



### MULTI-STEPPED GROOVES

Increase surface area of the tread for greater traction in dirt or loose gravel.



### LARGE TREAD BLOCKS

Mean more stability at highway speeds and enhanced handling with less noise.



### AGGRESSIVE SIDEWALL PROTECTORS

Fight off sidewall cuts and abrasions, and increase off-road bite.




### STAGGERED CENTER BLOCKS

Create more biting edges, which improve off-road performance.





### SPECIAL COMPOUND TECHNOLOGY

Contributes to long, even wear through the integration of silica molecules.



### THREE-PLY CASING CONSTRUCTION FOR LOAD RANGE E FITMENTS

Handles heavy loads at highway speeds and delivers outstanding durability.

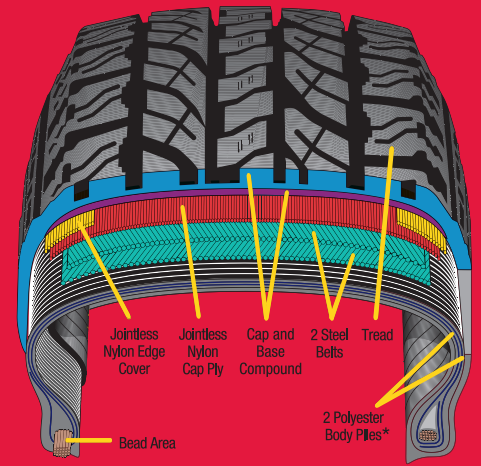

Construction may vary by size, speed rating and/or load range.  
\*Load Range E fitments have three-ply casing construction.

### For Vehicles Mentioned Below and Many Others:

Chevy Avalanche  
Chevy Silverado  
Dodge Dakota  
Dodge Ram  
Ford Expedition  
Ford Explorer  
Ford F-Series  
Ford Ranger

Hummer H2  
Jeep Cherokee  
Nissan Frontier  
Nissan Titan  
Nissan Xterra  
Toyota 4Runner  
Toyota Tacoma  
Toyota Tundra

### Yokohama's 30-day Performance Promise:

- Test drive the Geolandar A/T-S for 30 days. If not completely satisfied, bring them back for a full refund. See dealer for complete details.



### Assurance of Value:

- 50,000-Mile Limited Treadwear Warranty on all sizes under 20" excluding load range E.
- 40,000-Mile Limited Treadwear Warranty on sizes 20" and above and load range E.



# GEOLANDAR A/T-S®



## Size Chart

Tire Size	Part No.	UTQG Rating	Unit Weight (lbs.)	Measuring (Inches)	Approved (Inches)	Rim Width		Inflated Dimensions			Loaded Dimensions		Max. Load at Cold Inflation Pressure (lbs.@psi)		Type	Load I.D.
						Overall Width (Inches)	Overall Diameter (Inches)	Tread Width (Inches)	Tread Depth (32/Inch)	Static Radius (Inches)	Revs. Per Mile	Single	Dual			
205/70R15 96S	01229	500/A/B	24.69	6.0	5.0 - 7.0	8.3	26.5	6.4	12.0	12.0	783	1565@51		BW	SL	
215/70R15 98S	01261	500/A/B	26.24	6.5	5.5 - 7.0	8.8	26.9	6.7	12.0	12.1	774	1653@51		BW	SL	
P225/70R15 100S	01258	500/A/B	29.10	6.5	6.0 - 7.5	9.1	27.6	7.0	12.0	12.4	753	1753@51		OWL	SL	
P235/70R15 102S	01245	500/A/B	31.09	7.0	6.0 - 8.0	9.6	28.0	7.3	13.0	12.6	743	1896@51		OWL	SL	
P235/75R15 108S	01235	500/A/B	34.17	6.5	6.0 - 8.0	9.3	28.9	7.3	13.0	12.9	720	2183@50		OWL	XL	
265/70R15 112S	01228	500/A/B	38.14	8.0	7.0 - 9.0	10.9	29.7	8.3	13.0	13.2	700	2469@51		BW	SL	
215/60R16 95H	01259	500/A/A	25.13	6.5	6.0 - 7.5	8.7	26.1	6.7	12.0	11.9	796	1521@51		BW	SL	
215/65R16 98H	01260	500/A/A	26.24	6.5	6.0 - 7.5	8.7	27.0	6.7	12.0	12.3	768	1653@51		BW	SL	
215/70R16 100S	01224	500/A/B	28.00	6.5	5.5 - 7.0	8.6	28.0	6.7	12.0	12.7	742	1764@51		BW	SL	
225/70R16 102H	01262	500/A/B	30.40	6.5	6.0 - 7.5	9.1	28.3	7.0	12.0	12.8	734	1874@51		BW	SL	
235/60R16 100H	01253	500/A/A	28.22	7.0	6.5 - 8.5	9.4	27.0	7.3	12.0	12.3	769	1764@51		BW	SL	
P235/70R16 107S	01239	500/A/B	33.73	7.0	6.0 - 8.0	9.5	29.2	7.3	13.0	13.2	711	2149@50		OWL	XL	
P245/70R16 106S	01236	500/A/B	34.83	7.0	6.5 - 8.0	9.8	29.7	7.6	13.0	13.3	700	2094@51		OWL	SL	
255/65R16 109H	01241	500/A/A	35.24	7.5	7.0 - 9.0	10.4	29.1	8.0	13.0	13.1	713	2271@51		BW	SL	
P255/70R16 109S	01238	500/A/B	37.04	7.5	6.5 - 8.5	10.2	30.3	8.0	13.0	13.6	685	2271@51		OWL	SL	
P265/70R16 111S	01233	500/A/B	39.24	8.0	7.0 - 9.0	10.9	30.7	8.3	13.0	13.7	676	2403@51		OWL	SL	
275/70R16 114S	01240	500/A/B	42.67	8.0	7.0 - 9.0	10.9	31.4	8.6	13.0	14.0	662	2601@51		BW	SL	
215/60R17 96H	01299	500/A/A	26.80	6.5	6.0 - 7.5	8.7	27.1	6.7	12.0	12.4	767	1565@51		BW	SL	
225/60R17 99H	01263	500/A/A	29.72	6.5	6.0 - 8.0	9.1	27.6	7.0	12.0	12.6	751	1709@51		BW	SL	
225/65R17 102H	01266	500/A/A	31.09	6.5	6.0 - 7.5	9.1	28.5	7.0	12.0	13.0	728	1874@51		BW	SL	
225/70R17 108T	01267	500/A/B	33.20	6.5	6.0 - 7.5	9.1	29.6	7.0	13.0	13.4	701	2205@50		BW	XL	
235/65R17 108H	01247	500/A/A	33.73	7.0	6.5 - 8.5	9.4	29.2	7.3	13.0	13.2	712	2205@50		BW	XL	
P235/70R17 108S	01268	500/A/B	36.20	7.0	6.0 - 8.0	9.5	30.3	7.3	13.0	13.7	686	2205@50		OWL	XL	
245/65R17 107H	01252	500/A/A	34.83	7.0	7.0 - 8.5	9.6	29.6	7.6	13.0	13.4	701	2149@51		BW	SL	
255/65R17 110H	01250	500/A/A	36.60	7.5	7.0 - 9.0	10.2	30.3	8.0	13.0	13.7	685	2337@51		BW	SL	
P255/70R17 110S	01269	500/A/B	40.10	7.5	6.5 - 8.5	10.2	31.3	8.0	13.0	14.1	664	2337@51		OWL	SL	
265/65R17 112H	01246	500/A/A	38.14	8.0	7.5 - 9.5	10.7	30.7	8.3	13.0	13.9	675	2469@51		BW	SL	
P265/70R17 113S	01237	500/A/B	40.79	8.0	7.0 - 9.0	10.8	31.9	8.3	13.0	14.3	651	2535@51		OWL	SL	
P275/60R17 110S	01264	500/A/B	43.70	8.0	7.5 - 9.5	11.1	30.1	8.6	13.0	13.6	690	2337@51		OWL	SL	
275/65R17 115H	01248	500/A/A	41.45	8.0	7.5 - 9.5	11.0	31.3	8.6	13.0	14.1	664	2679@51		BW	SL	
285/65R17 116H	01298	500/A/A	42.60	8.5	8.0 - 10.0	11.6	31.6	8.3	14.0	14.2	658	2756@51		BW	SL	
225/55R18 98H	01300	500/A/A	28.50	7.0	6.0 - 8.0	9.1	27.8	7.3	12.0	12.8	748	1653@51		BW	SL	
265/60R18 110H	01270	500/A/A	41.01	8.0	7.5 - 9.5	10.8	30.5	8.3	12.0	13.9	681	2337@51		BW	SL	
P265/70R18 114S	01272	500/A/B	41.40	8.0	7.0 - 9.0	10.8	32.8	8.3	14.0	14.8	663	2601@51		BW	SL	
275/60R18 112H	01271	500/A/A	41.90	8.0	7.5 - 9.5	11.1	31.0	8.6	12.0	14.1	669	2469@51		BW	SL	
285/60R18 116H	01297	500/A/A	42.50	8.5	8.0 - 10.0	11.5	31.6	8.9	13.0	14.3	658	2756@51		BW	SL	
275/55R20 117S	01278	500/A/B	41.25	8.5	7.5 - 9.5	11.0	32.0	9.0	13.0	14.7	648	2833@50		BW	XL	
275/60R20 115S	01279	500/A/B	43.80	8.0	7.5 - 9.5	11.1	33.5	8.6	13.0	15.2	621	2679@51		BW	SL	
305/45R20 112H	01242	500/A/A	44.97	10.0	9.5 - 11.5	11.7	31.1	10.9	13.0	14.3	669	2469@51		BW	SL	
305/50R20 120S	01280	500/A/B	48.50	9.5	8.5 - 11.0	12.6	32.4	10.9	14.0	14.8	640	3086@50		BW	XL	
LT215/75R15 100/97S (C)	01257		32.41	6.0	5.5 - 7.0	8.3	27.9	6.7	16.0	13.4	738	1765@50	1610@50	OWL		
LT235/75R15 104/101S (C)	01230		36.82	6.5	6.0 - 7.0	9.3	29.2	7.3	16.0	14.0	706	1985@50	1820@50	OWL		
LT215/85R16 110/107R (D)	01244		37.92	6.0	5.5 - 7.0	8.7	30.5	6.3	16.0	14.6	676	2335@65	2150@65	OWL		
LT225/75R16 110/107 (D)	01243		37.70	6.0	6.0 - 7.0	8.8	29.5	7.0	16.0	14.1	699	2335@65	2150@65	OWL		
LT235/85R16 120/116R (E)	01232		49.60	6.5	6.0 - 7.5	9.4	31.9	7.3	16.0	15.2	647	3042@80	2778@80	OWL		
LT245/75R16 120/116R (E)	01222		47.62	7.0	6.5 - 8.0	9.7	30.7	7.6	16.0	14.5	674	3042@80	2778@80	OWL		
LT265/75R16 123/120R (E)	01254		50.93	7.5	7.0 - 8.0	10.6	31.9	8.3	17.0	15.2	648	3415@80	3085@80	BW		
LT265/75R16 119/116R (D)	01226		49.60	7.5	7.0 - 8.5	10.7	31.9	8.3	17.0	15.3	647	3000@65	2755@65	OWL		
LT285/75R16 122/119R (D)	01227		55.34	8.0	7.5 - 9.0	11.5	33.1	8.9	18.0	15.8	623	3305@65	3000@65	BW		
LT315/75R16 121R (D)	01249		61.51	8.5	8.0 - 10.0	12.6	34.5	9.8	18.0	16.3	602	3195@50		BW		
LT235/80R17 120/117R (E)	01293		52.00	6.5	6.0 - 7.5	9.1	32.0	7.3	16.0	15.1	654	3085@80	2835@80	BW		
LT245/70R17 119/116 (E)	01251		46.90	7.0	6.5 - 8.0	9.6	30.8	7.6	17.0	14.6	673	3000@80	2755@80	BW		
LT245/75R17 121/118R (E)	01295		44.80	7.0	6.5 - 7.5	9.6	31.8	7.6	17.0	15.0	656	3195@80	2910@80	BW		
LT265/70R17 121/118R (E)	01234		52.20	8.0	7.0 - 8.5	10.5	32.0	8.3	17.0	15.0	651	3195@80	2910@80	BW		
LT285/70R17 121/118R (D)	01292		56.20	8.5	7.5 - 9.0	11.3	33.1	8.9	18.0	15.8	629	3195@65	2910@65	BW		
LT315/70R17 121/118R (D)	01225		61.93	9.5	8.5 - 10	12.5	34.6	9.8	18.0	16.3	601	3195@50	2910@50	BW		
LT275/65R18 113/110S (C)	01265		52.00	8.0	7.5 - 9.0	11.1	32.3	8.6	17.0	15.2	649	2535@50	2335@50	OWL		
LT275/65R18 123/120R (E)	01296		57.00	8.0	7.5 - 9.0	11.0	32.4	8.6	18.0	15.4	644	3415@80	3085@80	BW		
LT285/65R18 121/118R (D)	01301		54.60	8.5	8.0 - 10.0	11.1	32.6	8.9	17.0	15.3	648	3195@65	2910@65	BW		
LT325/60R20 121/118S (D)	01303		69.40	9.5	9.0 - 12.0	13.0	35.7	10.6	17.0	17.1	581	3195@50	2910@50	BW		
30X9.50R15 104S (C)	01231		37.26	7.5	6.5 - 8.5	9.7	29.6	7.6	16.0	14.0	699	1985@50		OWL		
31X10.50R15 109S (C)	01223		43.65	8.5	7.0 - 9.0	10.7	30.6	8.3	17.0	14.4	680	2270@50		OWL		
32X11.50R15 113S (C)	01255		51.59	9.0	8.0 - 11.0	11.5	31.5	9.1	17.0	14.8	659	2535@50		OWL		
33X12.50R15 108S (C)	01256		54.31	10.0	8.0 - 11.0	12.8	32.5	9.8	17.0	15.5	636	2205@35		OWL		
37X12.50R17 124R (D)	01273		71.60	10.0	8.5 - 11.0	12.9	36.5	9.8	17.0	17.4	573	3525@50		BW		
37X12.50R18 123R (D)	01275		73.80	10.0	8.5 - 11.0	12.7	36.6	9.8	18.0	17.4	579	3415@50		BW		
37X12.50R20 120R (D)	01276		73.30	10.0	8.5 - 11.0	12.2	36.7	9.8	18.0	17.5	577	3085@50		BW		

SL = Standard Load

XL = Extra Load and Reinforced Load



Consumer Affairs: 1-800-722-9888  
 Corporate Headquarters: Fullerton, CA 1-714-870-3800 • 1-800-423-4544  
 Visit our website at: [yokohamatire.com](http://yokohamatire.com)